

Ultra Low Noise Crystal Oscillator


OX-U/OY-U Series - 3.2 x 2.5 / 2.5 x 2.0 mm SMD Crystal Oscillator

FEATURE

- Ultra Low Phase Noise designed specifically for Hi-Resolution Audio (HiFi, HD Audio)
- F=45.1584MHz (@1.8V, 25°C): typical low close-in phase noise of -100dBc/Hz@10Hz-offset, -127dBc/Hz@100Hz-offset, and a noise floor of -157dBc/Hz
- F=49.152MHz (@1.8V, 25°C): typical low close-in phase noise of -100dBc/Hz@10Hz-offset, -128dBc/Hz@100Hz-offset, and a noise floor of -157dBc/Hz
- Wide operating temperature range: -40 to +105°C


TYPICAL APPLICATION

- Automotive multimedia, Automotive radar
- DACs and ADCs for Hi-Fi, Digital Audio Broadcasting (DAB), Professional audio equipment
- Smartphone, Tablet, Wireless module

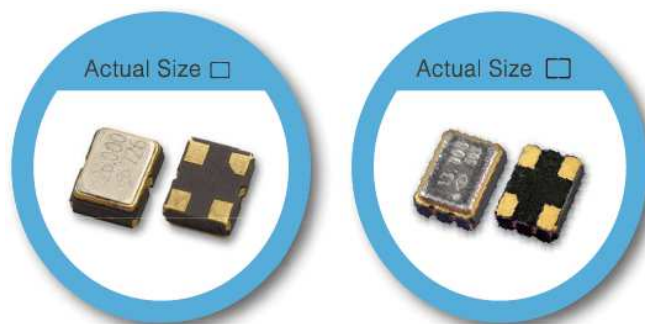


RoHS Compliant

DIMENSION (mm)

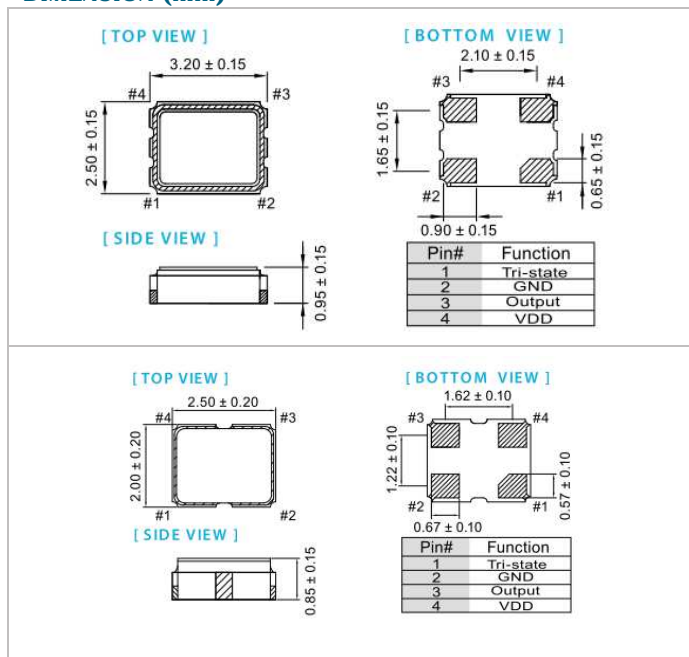

SOLDER PAD LAYOUT (mm)

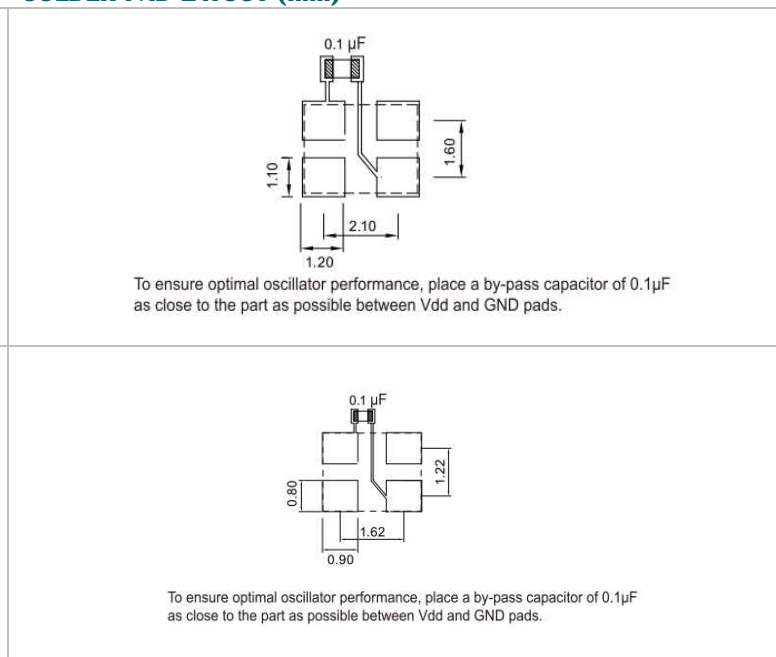

ELECTRICAL SPECIFICATION

Parameter	3.3V		2.5V		1.8V		Unit
	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD) ±10%	2.97	3.63	2.25	2.75	1.62	1.98	V
Frequency Range	20	60	20	60	20	60	MHz
Supply Current 20 ≤ Fo ≤ 60MHz	--	8	--	7	--	5	mA
Duty Cycle	45	55	45	55	45	55	%
Output Level (CMOS) Output High (Logic "1")	2.97		2.25		1.62		V
Output Low (Logic "0")		0.33		0.25		0.18	V
Transition Time: Rise/Fall Time+		6		6		6	nSec
Start Time		2		2		2	mSec
Tri-State(Input to Pin 1) Enable (High voltage or floating)	2.31		1.75		1.26		V
Disable (Low voltage or GND)		0.99		0.75		0.54	V
RMS Phase Jitter (integrated 12kHz ~ 20MHz)		0.5		0.5		0.5	pSec
Aging (@25°C, 1st year)		±3		±3		±3	ppm
Storage Temp. Range	-55	125	-55	125	-55	125	°C
Phase Noise (Typ.)	F=20MHz		F=40MHz		F=60MHz		dBc/Hz
1.8V, 25°C	1 kHz offset	-147		-143		-139	dBc/Hz
	100 kHz offset	-156		-154		-150	dBc/Hz
2.5 to 3.3V, 25°C	1 kHz offset	-151		-148		-142	dBc/Hz
	100 kHz offset	-157		-156		-156	dBc/Hz

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position
+Transition times are measured between 10% and 90% of VDD, with an output load of 15pF

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	±20	±25	±30	±50
-10~+60		○	○	○	○
-20~+70		△	○	○	○
-40~+85		×	○	○	○
-40~+105		×	×	△	○

* O: Available △: Conditional X: Not available

*Inclusive of calibration @ 25°C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.

Specifications subject to change without notice